
# Prepare for your exam certification with our C\_TADM\_21 Certified SAP [Q19-Q39

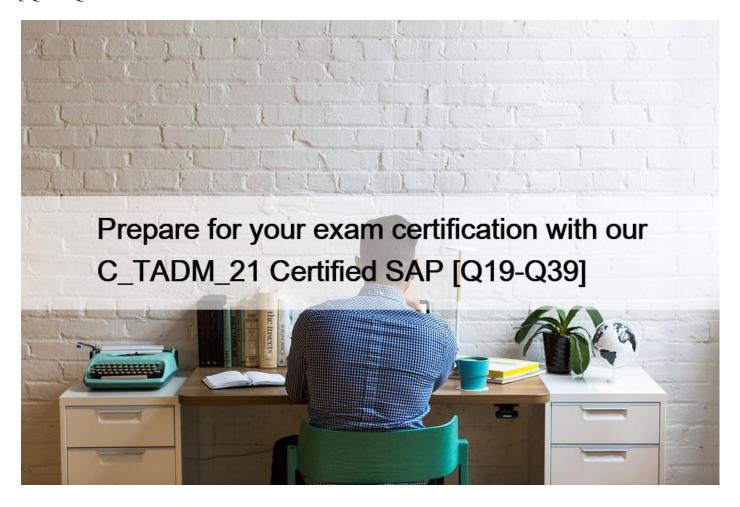

Prepare for your exam certification with our C\_TADM\_21 Certified SAP Free SAP C\_TADM\_21 Exam 2022 Practice Materials Collection NO.19 What can you do to determine the SAPUI5 patch level in an AS ABAP-based SAP system?

- \* Execute the ICF service /sap/public/bc/ui5\_ui5
- \* Check the version of software component SAP\_UI
- \* Use the program WDG\_MAINTAIN\_UR\_MIMES
- \* Use the program /UI5/UI5\_UPLOAD\_PATCH\_TO\_MIME

**NO.20** You can use operation modes to change the quantity of which work process types? Note: There are 3 correct answers to this question.

- \* Standby/restricted/reserved dialog work process
- \* Dialog work process
- \* Update work process
- \* Spool work process
- \* Background work process

**NO.21** What is the correct parameter replacement sequence in an AS Java-based SAP system? (Note: the sequences below are sorted by decreasing priority).

- \* Template custom Instance custom Template default Instance default
- \* Instance default Instance custom Template default Template custom
- \* Instance custom Instance default Template custom Template default
- \* Template default Instance default Template custom Instance custom

**NO.22** When performing a standard SAP HANA database system installation, which users will be created or validated during that installation? Note: There are 2 correct Answers to this question.

- \* SYSTEM
- \* SAP<SID>
- \* <sid>crypt
- \* Sapadm

**NO.23** Which actions can be performed with the Software Update Manager (SUM) for an AS ABAP-based SAP system? Note: There are 3 correct Answers to this question.

- \* Applying an SAP kernel patch
- \* Applying a SPAM/SAINT update
- \* Correcting software information via a CISI run
- \* Installing an SAP Host Agent
- \* Setting up the Transport Management System (TMS)

**NO.24** You have configured an SAP Web Dispatcher and set: wdisp/ssl\_encrypt=2 icm/server\_port\_<xx>=&#8230;PROT=HTTP. Which communication channels does this establish?

- \* HTTP between the client and SAP Web Dispatcher. HTTPS between SAP Web Dispatcher and the SAP system
- \* HTTPS between the client and SAP Web Dispatcher. HTTP between SAP Web Dispatcher and the SAP system
- \* HTTP between the client and SAP Web Dispatcher. HTTP between SAP Web Dispatcher and the SAP system
- \* HTTPS between the client and SAP Web Dispatcher. HTTPS between SAP Web Dispatcher and the SAP system

NO.25 Which characteristics describe an SAP HANA multitenant database container (MDC) system? Note:

There are 3 correct Answers to this question.

- \* The name server provides index server functionality for the system database.
- \* Database isolation increases the isolation between tenant databases on operating system level.
- \* Each tenant database runs its own compile server and the preprocessor server.
- \* The name server owns information about the location of tables and table partitions in databases.
- \* A multitenant database container system is identified by a single system ID (SID).

**NO.26** You are installing an SAP S/4HANA Server 1909 system, using s4xhost as application server host and haxhost as database host. Which actions can Software Provisioning Manager (SWPM) perform? Note: There are 3 correct answers to this question.

- \* Set database import parameters for the database running on haxhost
- \* Copy the database installation media from s4xhost to haxhost
- \* Install the Central Service instance on s4xhost
- \* Install the database on haxhost
- \* Copy the database backup media from s4xhost to haxhost

NO.27 How does a Transport of Copies differ from a Workbench Request? Note: There are 2 correct Answers to this question

- \* After the import, repository objects in the target system are classified as copies.
- \* When creating the transport request, a target system without a consolidation route can be selected.
- \* No cofile is created, when releasing the transport request with the Transport Organizer (SE09).
- \* When importing, the transport request is not forwarded to subsequent delivery systems.

NO.28 What is the purpose of the SAP HANA secure user store (hdbuserstore)? Note: There are 2 correct Answers to this question.

- \* To store connection information on the SAP HANA XS advanced engine
- \* To configure an SAP HANA auto-restart for fault recovery
- \* To store connection information on the SAP HANA database client
- \* To configure failover support in a 3-tier scenario

**NO.29** In the role maintenance transaction (PFCG) of an AS ABAP-based SAP system, which step grants the authorizations of a role to a user master record?

- \* Assign a user to the role
- \* Save the role
- \* Generate the profile
- \* Perform a user comparison

**NO.30** In which subdirectories of sapmnt can you find information about startup problems of an AS Java-based SAP system? Note: There are 2 correct Answers to this question.

- \* D<instance no.>/work
- \* J<instance no.>/work
- \* J<instance no.>/log
- \* SCS<instance no.>/work

**NO.31** In an AS ABAP-based SAP system, a user performs the second dialog step in a dialog transaction. The dialog work process used in the first dialog step is occupied by a different user. What happens with this second user request?

- \* The dialog work process that handled the first dialog step performs a rollout to handle the request.
- \* The request is processed asynchronously by an update work process.
- \* The request remains in the request queue until the dialog work process that handled the first dialog step is free again.
- \* The request is processed by a different free dialog work process.

**NO.32** During the import of a transport request, which tools write log files to the tmp subdirectory of the transport directory? Note: There are 3 correct Answers to this question.

- \* RDDMNTAB
- \* R3load
- \* R3trans
- \* RDDMASGL
- \* Tp

NO.33 You want to perform rapid activation for SAP Fiori. In what order should you run the task lists?

\* 1. SAP\_GW\_FIORI\_ERP\_ONE\_CLNT\_SETUP 2. SAP\_FIORI\_FOUNDATION\_S4 3.

# SAP FIORI CONTENT ACTIVATION

\* 1. SAP\_FIORI\_FOUNDATION\_S4 2. SAP\_GW\_FIORI\_ERP\_ONE\_CLNT\_SETUP 3.

# SAP\_FIORI\_CONTENT\_ACTIVATION

\* 1. SAP GW FIORI ERP ONE CLNT SETUP 2. SAP FIORI CONTENT ACTIVATION 3.

# SAP\_FIORI\_FOUNDATION\_S4

\* 1. SAP\_FIORI\_FOUNDATION\_S4 2. SAP\_FIORI\_CONTENT\_ACTIVATION 3.

# SAP\_GW\_FIORI\_ERP\_ONE\_CLNT\_SETUP

NO.34 How are savepoints triggered? Note: There are 2 correct Answers to this question.

- \* By performing a database backup
- \* By a database soft shutdown
- \* By issuing a transactional commit
- \* By performing a delta merge

NO.35 What action(s) can you perform in the SAP HANA cockpit to back up the complete database system?

- \* Back up the system database and all tenant databases individually.
- \* Back up the system database and all tenant databases in one step.
- \* Back up the system using a fallback snapshot for every database.
- \* Back up the system using a database snapshot and a data snapshot.

NO.36 You are using a Change and Transport System (CTS) for the transport of native SAP HANA applications.

Which tool can you

use to create a transport request for these applications in the CTS system?

- \* Transport Organizer Web UI (in transaction STMS)
- \* Transport Organizer (Extended View) (in transaction SE01)
- \* Transport Organizer (in transaction SE09)
- \* Database Assistant (in transaction DB50N)

NO.37 How does SAP HANA encrypt the data persistence layer?

- \* By row level
- \* By page level
- \* By column level
- \* By table level

**NO.38** In ABAP programs, what are features of ABAP SQL that are not available with native SQL? Note: There are 2 correct Answers to this question.

- \* Database independence
- \* Execution without a work process
- \* Execution of ABAP programs as database procedures
- \* Use of the AS ABAP data buffer

NO.39 You plan to update an AS ABAP-based SAP system with the role "Quality Assurance System".

Which of the following actions might be required before you start Software Update Manager (SUM) for this system? Note: There are 2 correct answers to this question.

- \* Import the modification adjustment transports from the update of the "Development System".
- \* Follow the instructions in the SAP Notes for the used version of SUM.
- \* Update the database software.
- \* Execute the SAP Load Generator (SGEN) transaction for invalid loads.

Pass SAP C\_TADM\_21 Actual Free Exam Q&As Updated Dump:

https://www.dumpsmaterials.com/C\_TADM\_21-real-torrent.html]